



Tooling
USB A:990936
USB B:960650

REVISIONS			
DATE	LTR	DESCRIPTION	APVD.

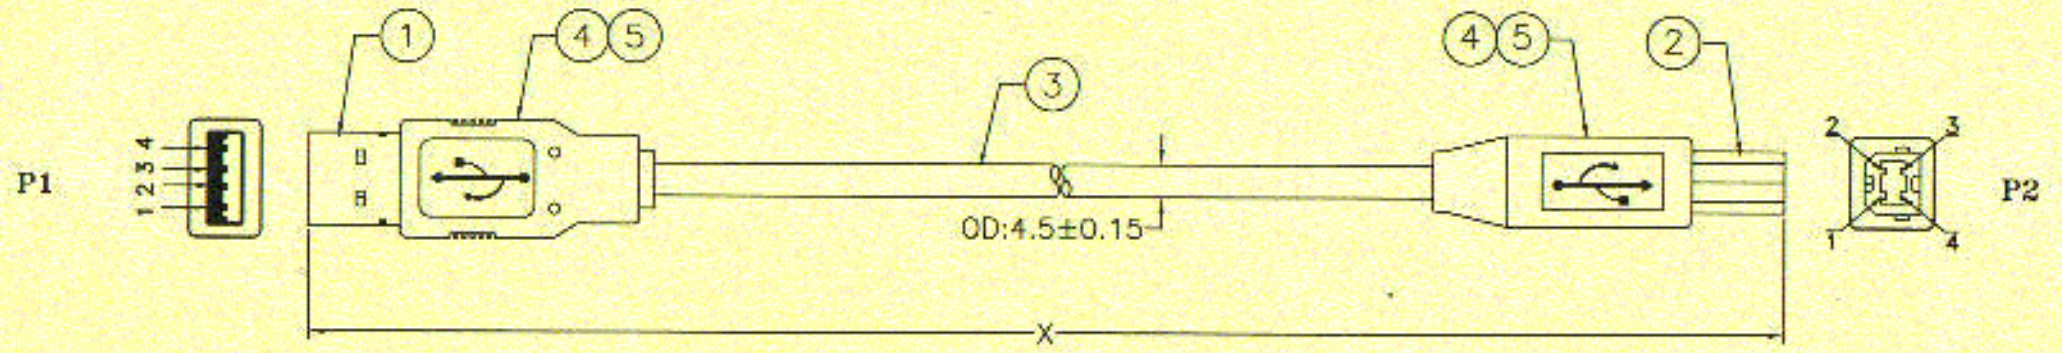

PIN ASSIGNMENT :

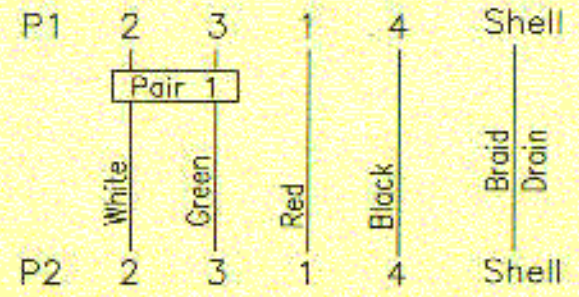

TABEL:

PART NO	ITEM NO	LENGTH
433-0894	CUBAMUBBM28020033UM-11E	1000±25
433-0917	CUBAMUBBM28020100UM-11E	3000±50

5	MM	SFC3010001	Copper Foil 360' Soldered.	
4	KG	DMVNO40CL001	Overmolded PVC Color:Clear(CL01).	
3	1 EA	W272584CL1P2B000XM01	UL2725 1Pair*28AWG+2Cond.*24AWG+Al/Foil +Drain+Braid,Jacket Color:Clear(CL01).	
2	1 EA	CUSBB004MWHNIT000002	USB 2.0 4Pin Male,B Type.Contact:Gold Flash, Shell: Nickel Plated, Insulation: White.	
1	1 EA	CUSBA004MWHNIT000002	USB 2.0 4Pin Male,A Type.Contact:Gold Flash, Shell: Nickel Plated, Insulation: White.	
ITEM	QTY	U/M	PART NO.	DESCRIPTION

UNLESS OTHERWISE SPECIFIED
 TOLERANCE :
 X .±0.2 ANGLES : ±2°
 XX ±0.1
 XXX ±0.05 DO NOT SCALE DRAWING

DRAWN BY: **ENWEN**
 CHECKED BY: *[Signature]*
 APPROVED BY: *[Signature]*
 DWG NO. **G433-0XXX**

TITLE: OEM CABLE ASSEMBLY			
SIZE: A	UNIT: MM	PART NO. 433-0XXX	REV. A
SCALE: 1:1	THIRD ANGLE PROJECTION		PAGE 1 OF 2
ITEM NO. CUBAMUBBM2002XXXXUM-11E	DATE 04/19/2002		